



Performance Specifications




Hot Side Temperature (°C)	25° C	50° C
Qmax (Watts)	72.0	81.5
Delta Tmax (°C)	65	74
I _{max} (Amps)	8.5	8.5
V _{max} (Volts)	15.4	16.4
Module Resistance (Ohms)	1.55	1.75

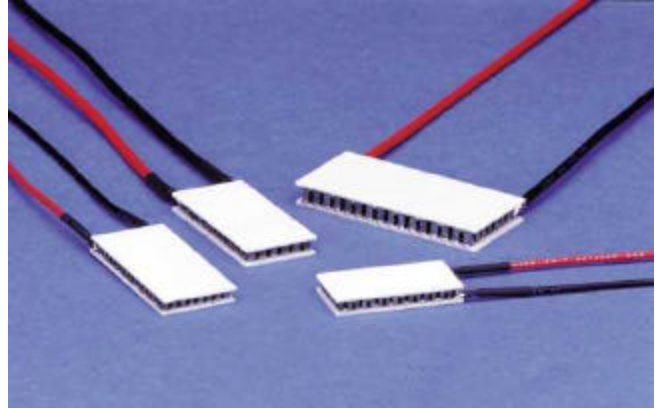

Performance Curves – Th = 25° C

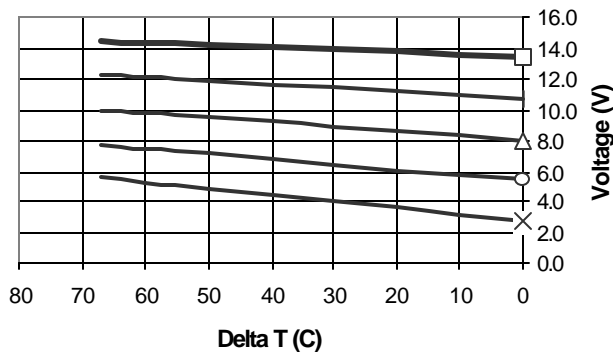

Performance Curves – Th = 50° C

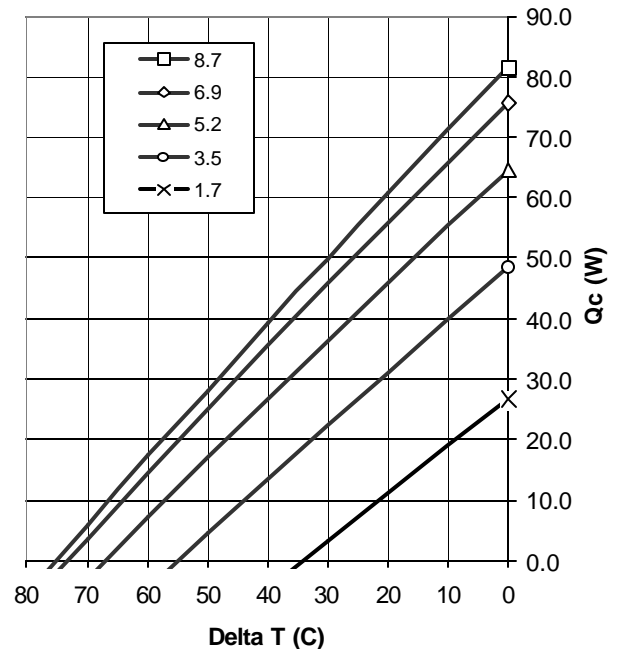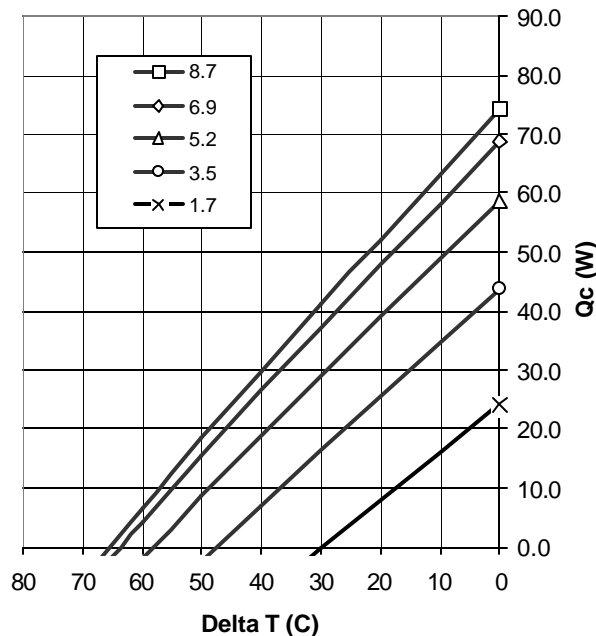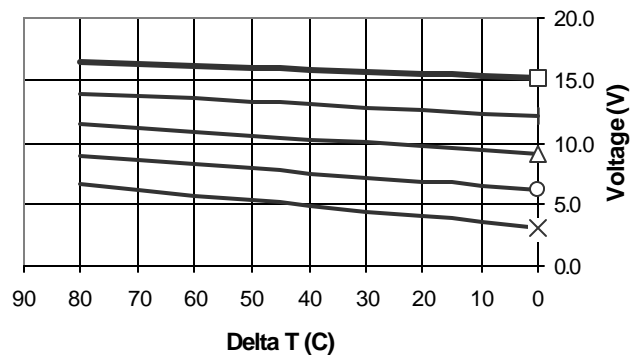

Mechanical Drawing

NO DRAWING
AVAILABLE

Ceramic Material: Alumina (Al_2O_3)
Solder Construction: 138°C, Bismuth Tin (BiSn)

Thickness and Surface Finish Specifications

Suffix	Thickness	Flatness & Parallelism	Hot Face	Cold Face	Lead Length
L	0.131" \pm 0.010"	0.0015" / 0.0015"	Lapped	Lapped	4.5"
-1	0.131" \pm 0.001"	0.001" / 0.001"	Lapped	Lapped	4.5"
-2	0.131" \pm 0.0005"	0.0005" / 0.0005"	Lapped	Lapped	4.5"
ML	0.135 \pm 0.010"	0.002" / 0.002"	Metallized	Lapped	4.5"
LM	0.135 \pm 0.010"	0.002" / 0.002"	Lapped	Metallized	4.5"
MM	0.139 \pm 0.010"	0.002" / 0.002"	Metallized	Metallized	4.5"

Operating Tips

- Max. Operating Temperature: 80°C
- Do not exceed I_{max} or V_{max} when operating module.
- Please consult Melcor for moisture and corrosion protection options.
- Solder tinning also available on metallized ceramics.

Page Intentionally
Left Blank



For additional information please contact Melcor:

INTERNET: www.melcor.com

ONLINE STORE: www.store.melcor.com

E-MAIL: tecooler@melcor.com

N. AMERICA: Melcor Corp., 1040 Spruce Street, Trenton, NJ 08648

Phone: (609) 393-4178, Fax: (609) 393-9461

For a worldwide distributor listing please visit our Global Sales Office web page at

<http://www.melcor.com/global.html>

Melcor and the Melcor logo are trademarks of Melcor Corporation.